


### DRIVER AND EVENT DETAILS

Name **Tony Hill**  
 Date **18/02/08**  
 Event **Carpatware r15**  
 Weather \_\_\_\_\_  
 Result **Q5th - Finished 14th**

### TRACK CONDITIONS

Grip Level **High**  Medium  Low   
 Track Type **Tight**  Open  Both   
 Surface **Carpet**  Tarmac  Wood   
 Venue **Indoor**  Outdoor   
 Track Condition **Smooth**  Bumpy   
 Track Temperature \_\_\_\_\_ °C \_\_\_\_\_ °F



### DRIVER NOTES

0.5mm used on front wheels. Earn top dock used with the brace nearer the rear

### CHASSIS AND ELECTRICS

Chassis **Kit**  
 Top Deck **Flex**  Standard  Stiff   
 Bodyshell **PF Speed Six**  
 Wing **Kit**  
 E.S.C. **MTronics IP6**  
 Servo **S9550**  
 Receiver \_\_\_\_\_  
 Number of Cells **4**  5  6   
 Type of Cells **Deman EP4500**

### MOTOR AND GEARING


Type **Brushed**  Brushless   
 Motor **Red Atlas**  
 Brush **767**  
 Spring **Purple + 8 -**  
 Timing **15turn**  
 Gear Pitch **48Dp**  64Dp   
 Spur Size **87**  
 Pinion Size **23**

### WHEELS, TYRES AND INSERTS

Wheels **LRP Pro Blood VTECH Z7**  
 Tyres \_\_\_\_\_  
 Inserts \_\_\_\_\_  
 Tyre Additive **Fish**  
 Additive Time **MIN (R)** **MIN (F)**  
 Tyre Warmers **Yes**  No



### FRONT SETTINGS

Drive **Diff**  Spool  One-Way  Height **High**  Low   
 Servo Saver **Yes**  No   
 Toe In Out **In-board**  Out-board  ° Toe-out \_\_\_\_\_  
 Screw Block Spacers **Front 1** mm **Rear 0.5** mm  
 Wishbone Quik-Klips **Front 2** mm **Rear 2** mm  
 Link Washers (Horizontal) **3** mm  
 Ride Height (Chassis to Floor) **5.5** mm  
 Droop (Chassis to Floor) **5 on gauge** mm  
 Anti-roll Bar **Yes**  No  1.20  1.40  1.60   
 Castor **0°**  2°  4°  6°   
 Camber **Positive**  Negative  **1** Deg  
 Link Washers (Vertical) **2** mm  
 Inboard Pin **Kick-up**  Anti-dive  Horizontal   
 Pivot Block Spacers **Front 1** mm **Rear 1** mm

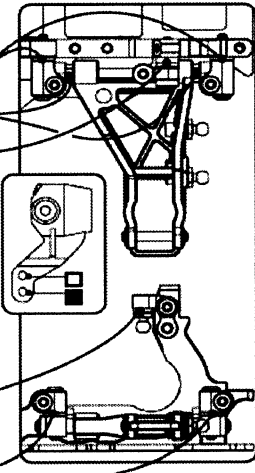


### Front Shocks

Oil **40** WT  
 Springs **HPI Silver**  
 Piston Holes **2**  3   
 length \_\_\_\_\_  
 Rebound \_\_\_\_\_ %





### Centre Track Rod





### REAR SETTINGS

Drive Height **High**  Low   
 Toe In **In-board**  ° Out-board  **1** °  
 Screw Block Spacers **Front 2** mm **Rear 0** mm  
 Wishbone Quik-Klips **Front 2** mm **Rear 2** mm  
 Link Washers (Horizontal) **3** mm  
 Ride Height (Chassis to Floor) **5.75** mm  
 Droop (Chassis to Floor) **4 on gauge** mm  
 Anti-roll Bar **Yes**  No  1.20  1.40  1.60   
 Camber **Positive**  Negative  **2** Deg  
 Link Washers (Vertical) **2** mm  
 Inboard Pin **Pro-Squat**  Anti-Squat  Horizontal   
 Pivot Block Spacers **Front 2** mm **Rear 2** mm

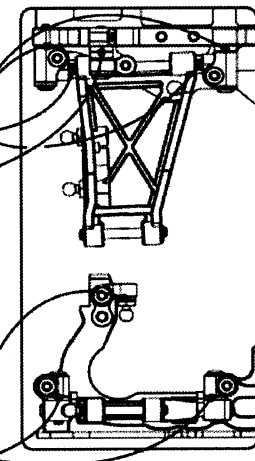

### Rear Shocks

Oil **30** WT  
 Springs **HPI Silver**  
 Piston Holes **2**  3   
 length \_\_\_\_\_  
 Rebound \_\_\_\_\_ %

### Driver Notes

1mm used on rear wheels