

Name: _____
Date: _____
Track: Base setup clay


Track conditions

Size: Open Med. Tight
 Traction: High Med. Low
 Surface: Smooth Med. Bumpy

Result

Race time / Lap: _____
 Best lap (1Lap): _____


Front suspension

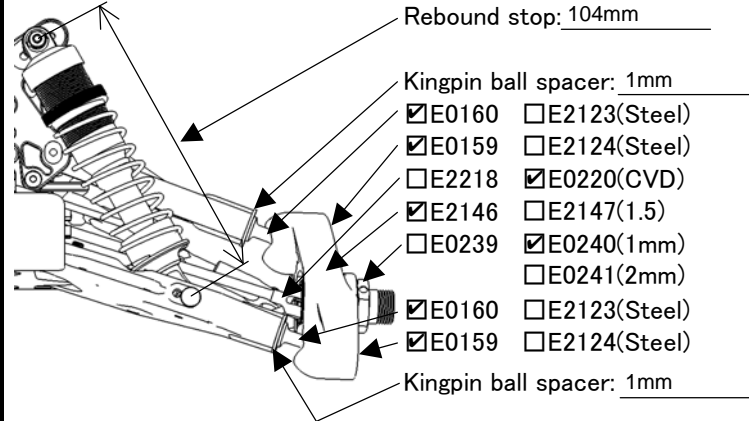


Ride height: 24mm
 Toe angle: 28.8mm
 Lower arm plate:
 E2144A,B
 E2154(CFRP 1mm)
 E2155(CFRP 1.2mm)
 Anti roll bar: 2.3mm
 Upper arm spacer: 2mm

Lower arm spacer: 0

Upper arm position:

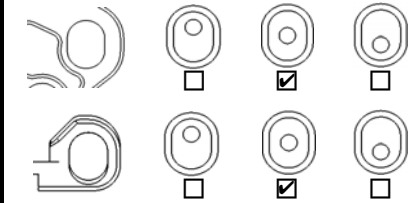

Lower arm position (Kick up):

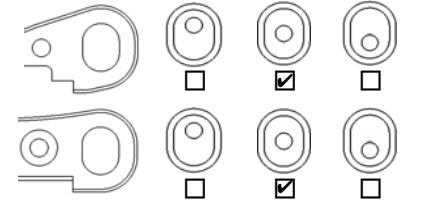


Front shocks

Piston: See notes Oil: 550
 Spring: 9.0
 Shock position:

Pivot ball position: Front Rear
 Damper stay: E2562(Aluminum)
 E2565(CFRP)

Steering ackerman

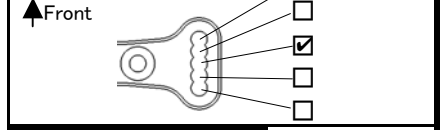


Front upper plate

E2148D E2158(CFRP)

Servo saver arm

E2301A E2310(Aluminum)


Rear suspension

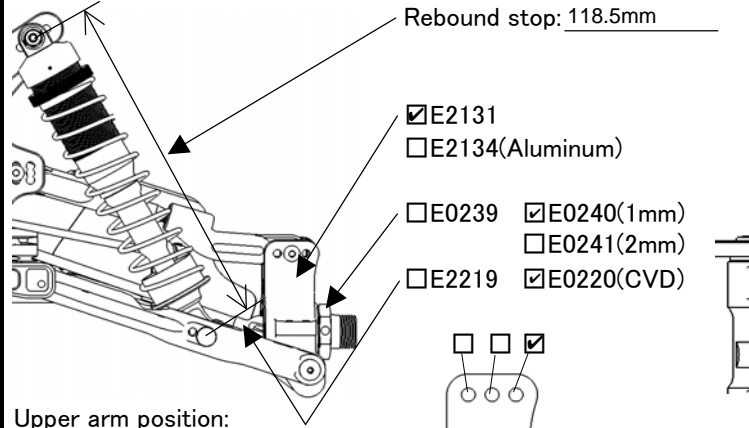


Ride height: 26mm
 Camber angle: 19.7mm
 Lower arm plate:
 E2145A,B
 E2156(CFRP 1mm)
 E2157(CFRP 1.2mm)
 Anti roll bar: 2.6
 Lower arm spacer: 1mm

Upright spacer: Middle

Upper arm position:

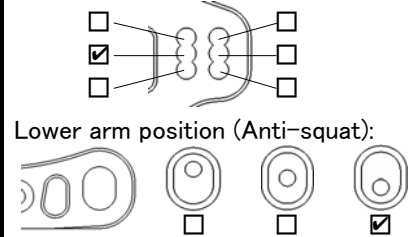

Lower arm position (Toe angle):

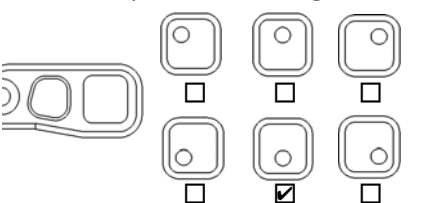

Rear shocks

Piston: See notes Oil: 450
 Spring: 10.5
 Shock position:

Pivot ball position: Front Rear
 Damper stay: E2563(Aluminum)
 E2566(CFRP)

Center shaft

E0223,E0259 E2228,E2229

Tension rod

Front: E2107A(Long) E2107B(Short)
 Rear: E2148C E0803(Rubber)

Weight



Engine

Type: _____ Plug: _____ Reducer: _____
 Muffler: _____ Fuel: _____ Gasket: _____
 Engine mount: E0701(Standard) Other _____

Diff. Gear

Oil

Front: 44/13T 42/12T 5000
 Rear: 44/13T 42/12T 3000
 Center: 44T 46T 7000
 47T 48T


Tires

	Front	Rear
Type:	_____	_____
Compound:	_____	_____
Inserts:	_____	_____
Wheel:	_____	_____

Clutch

3P 4P
 Clutch bell: 13T 14T
 Clutch shoes C0754 E0704 E0710 E2706
 Clutch spring 0.8 0.9 0.95 1.0 1.05 1.1

Body/Wing

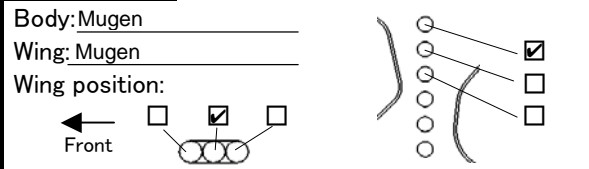

Comments

Front piston: 3x1.35 and 3x1.45
 Rear piston: 3x1.35 and 3x1.50
 E2168 steering plates.